

8 inputs module 24Vdc / 15mA




Passive interface module with 8 inputs for connection of electronic instruments, PLC and various interfaces.
 The module receives the digital input signals, it filters them and makes them compatible at the output, in a multi-pole flat connector.
 Each signal is displayed by a red LED.
 This system is used in equipment of different origins where there is the need for an electrical connection between them.

Technical features

Power supply	24Vac +/- 10%
Absorption	max 80mA.
Inputs	N.8 digital
Load for every channel	about 15mA
Wiring	Terminal block + 10-pole cable
Signaling	N.8 red LEDs
Operation conditions	0.. +55°C / 20..90% R.U. without condensation
Storage conditions	-25.. +80°C / 20..90% R.U. without condensation
Mounting	DIN rail EN 50022
Container	DIN bar container
Protection degree	IP20

Dimensions

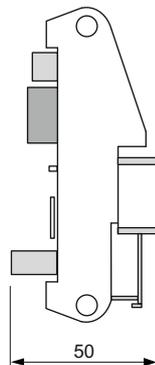

Electrical connections

