

Interface module with 4 relays 24Vdc / 10A




Passive relay interface module that receives commands from electronic equipment such as PLCs, industrial PCs, control modules, etc. and controls inductive and resistive loads of small power such as solenoid valves, contactors, small servomotors, lamps, resistors, etc. This type of module has a series of screw terminals that makes it universal and a multi-pin flat connector for quick connections.

Technical features

Power supply	24Vdc +/- 10%
Absorption	Max 150mA
Inputs	N.4 digital
Contact range	Max 10A / 250V resistive load
Wiring	Terminal block + 10-pole cable
Signaling	N.4 red LEDs active signal
Operation conditions	0.. +55°C / 20..90% R.U. without condensation
Storage conditions	-25.. +80°C / 20..90% R.U. without condensation
Mounting	DIN rail EN 50022
Container	DIN bar container
Protection degree	IP20

Dimensions

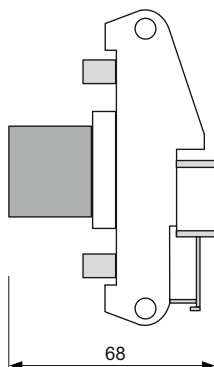

Electrical connections

