



Operator panel realized with interface function with RP series microprocessor systems.

The front is in silver anodised aluminum with hidden fixing screws, the keypad is golden to be used in environments with high humidity.


This operator panel has a powerful microprocessor with memory and two RS-485 and Can-BUS serial ports.

The software is protected by customizable passwords for security against tampering.

Technical features

Power supply	24Vdc +/- 5%
Absorption	Max 100mA
Display	LCD 20 x 4 blue rows
Keyboard	13 golden keys
Wiring	Serial RS-485 / CAN-BUS
Memory	Eeprom
Operation conditions	0.. +55°C / 20..90% R.U. without condensation
Storage conditions	-25.. +80°C / 20..90% R.U. without condensation
Mounting	panel
Container	In anodised aluminum
Protection degree	IP65 Front panel

Electrical connections

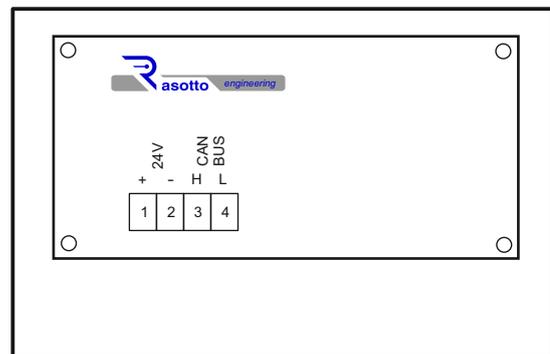

Dimensions

