



OPT4 control panel with touch screen and 4,3" color screen.

IMPORTANT

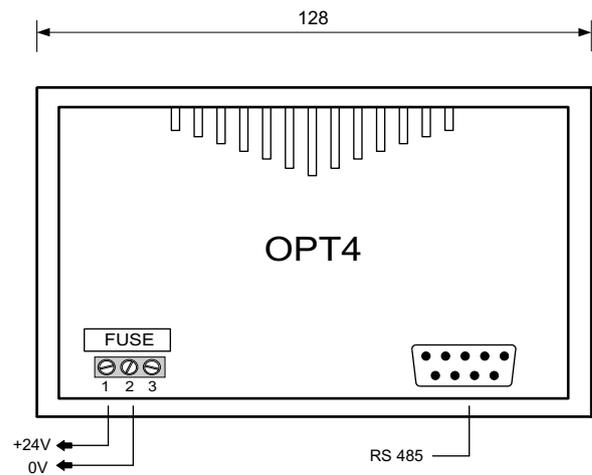
It is recommended to:

- 1) carry out any operation only with the system switched off, therefore in the absence of voltage
- 2) do not invert the connections between the power supply terminals n.1 and 2 (24Vdc).

Please note that the manufacturer is not responsible for the warranty in the event of the module being burned due to incorrect connections.

Technical features

Power supply	24Vdc +/- 20%
Absorption	400mA
Screen	4,3" 16,7M colors
Flash memory	128 MB
Serial system	RS-485
Resolution	480 x 272
Operation conditions	0.. +55°C / 20..90% R.U. without condensation
Storage conditions	-25.. +80°C / 20..90% R.U. without condensation
Mounting	panel
Container size	128 x 102 x 32 mm
Protection degree	IP65 Front panel

Electrical connections

Dimensions
